

SOLARPOLE

Integrated LED solar lighting solution



For project details




LOCALLY
manufactured

Up to
IP 65 IK 10

Key advantages

- Designed and manufactured in South Africa
- Designed to operate reliably at a high light output over an 11-hour period
- It has sufficient autonomy to cater for up to two continuous overcast or rainy days, to continue its reliable night operation
- Cylindrical integrated solar components
- Fits over existing Ø76mm poles
- Theft and vandal resistant
- Specifically engineered for high aesthetics and wind resistance
- Long life lithium (LifePO4) energy storage technology, offering up to 8 years battery lifetime
- Circular economy 3-star rating
- Warranty up to 5 years (*)

(*) Terms and conditions apply

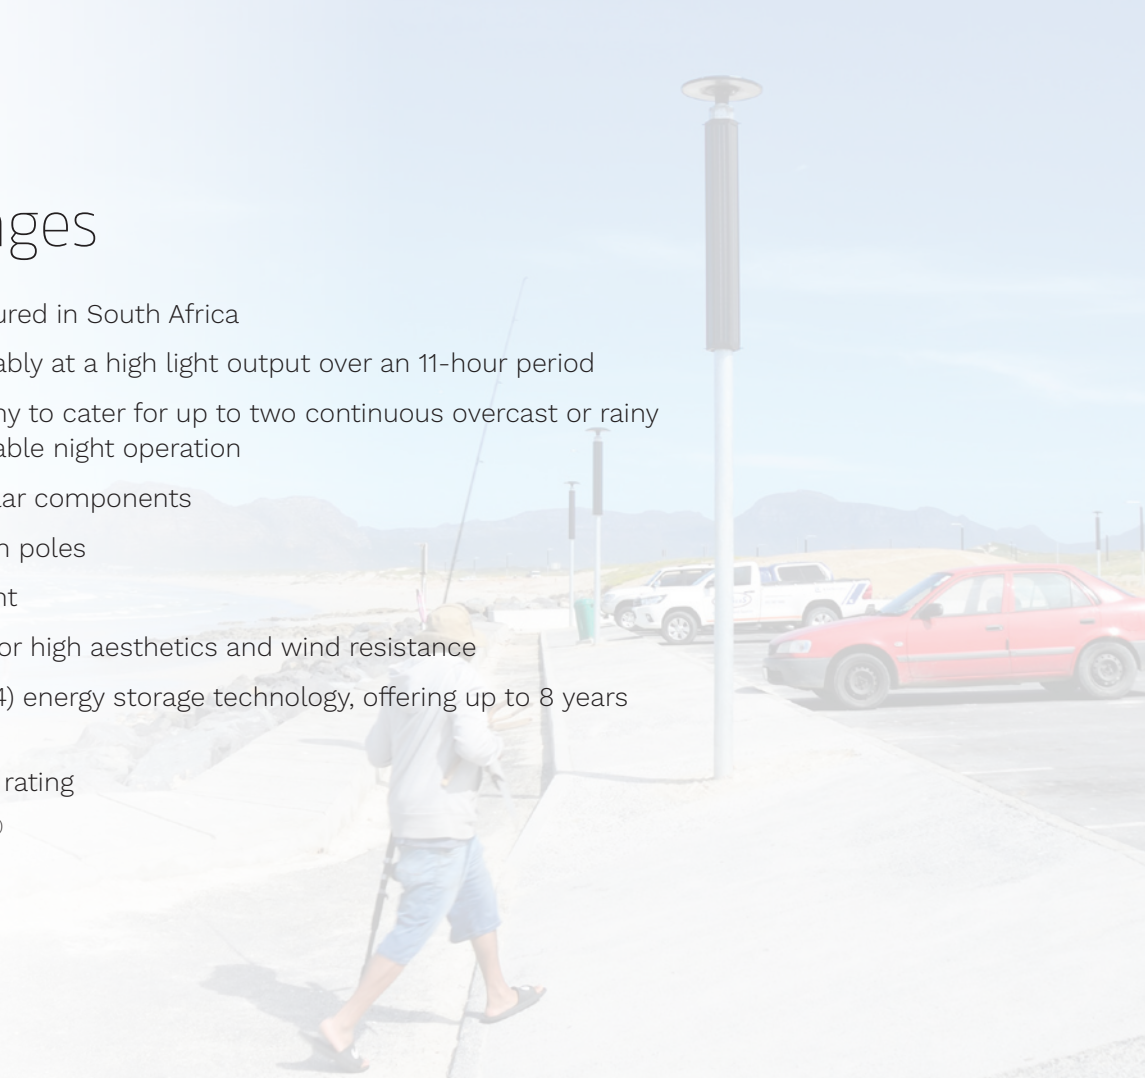


Characteristics

GENERAL INFORMATION

Autonomy days	2-3 days		
System operating voltage	12V DC		
Aerodynamic resistance (CxS)	Up to 0.59m ²		
Material	Brackets and fixation clamps: Hot-dipped galvanised mild steel	Solar module fixation: Cast aluminium	Solar module: Extruded aluminium / Tempered glass
Solar Module	Technology / Rated lifetime: Monocrystalline module - 25 years / 80%		Peak rated wattage: 200W
Energy storage	Technology / Expected lifetime: Lithium: 5-8 years		
Charge controller	Charge algorithm: Maximum Power Point Tracking (MPPT)	Rated lifetime: 20 years	Integrated data logger: Yes (up to 30 days)



OFF-GRID AREAS



CAR PARKS



SQUARES & PEDESTRIAN AREAS



URBAN & RESIDENTIAL STREETS



BIKE & PEDESTRIAN PATHS



SECURITY LIGHTING



SERVICE STATION

STREETLIGHT VERSION

Wattage (up to)	46W
Nominal flux (up to)	8,651lm
Luminaire output flux (up to)	7,353lm
Luminaire efficacy (up to)	160lm/W
Colour temperature	4000K (Neutral white 740) CRI ≥70
Lifetime of the LEDs @Tq 25°C	60,000h - L70B10
Operating temperature range (Ta) (up to)	-20°C up to +40°C

POST TOP VERSIONS

Wattage (up to)	26W
Nominal flux (up to)	5,132lm
Luminaire output flux (up to)	4,054lm
Luminaire efficacy (up to)	156lm/W
Colour temperature	4000K (Neutral white 740); 3000K (Warm white 730); 5700K (Cool white 757) CRI ≥70
Lifetime of the LEDs @Tq 25°C (up to)	60,000h - L70B10
Operating temperature range (Ta) (up to)	-20°C up to +40°C



Fisherman's Lane - Western Cape, South Africa

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



LOCALLY
manufactured

2024-03

Copyright © BEKA Schröder (Pty) Ltd – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.