


BEKANOVA

Decorative LED bulkhead range



LOCALLY
manufactured

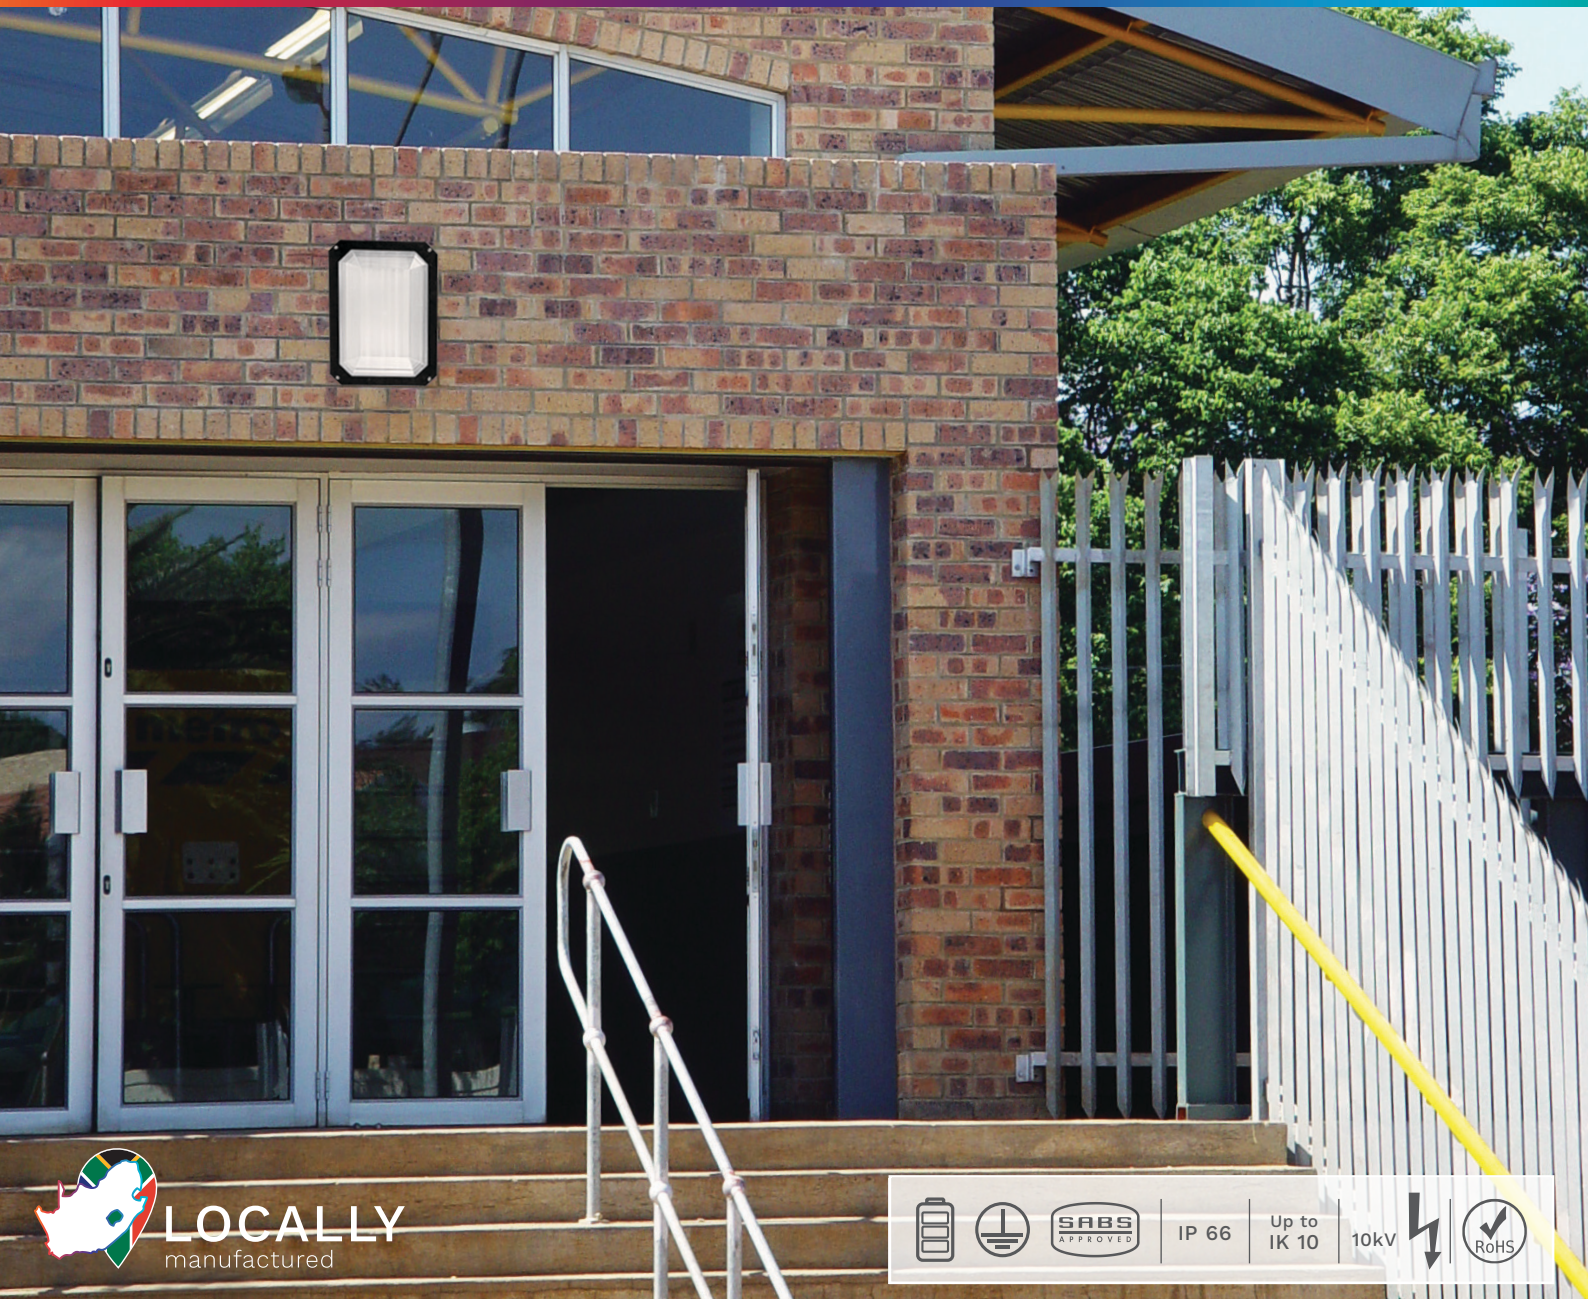

IP 66

Up to
IK 10

10kV



Key advantages

- Designed and manufactured in South Africa
- Designed to operate LED light sources of up to 42W without reducing the useful lifetime of up to 50 000 hours, at a lumen depreciation of not more than 30% (L70)
- Available in a battery back-up version
- Ta of up to 40°C
- Designed for energy-efficient lighting with low glare
- Designed to retrofit 70W and 100W high-pressure sodium and mercury vapour installations
- Surge protection 10kV/10kA
- 3-year warranty (Terms and conditions apply)

Characteristics

GENERAL INFORMATION

Testing standard	SANS 60598, SANS 62262		
Housing	Marine grade high-pressure die-cast aluminium (EN 1706 AC-44300)		
Protector	Non-discolouring injection moulded high-impact acrylic diffuser	Polycarbonate (optional)	
Housing finish	Unpainted aluminium		
Standard mounting	Wall/ceiling mounting	Pole mounting (optional)	Stirrup mounting (optional)
Nominal voltage	198-264V – 50Hz		
Surge protection	10kV / 10kA		
Operating temperature range (Ta)	-20°C up to +40°C		

BEKANOVA

Wattage (up to)	42W
Nominal flux (up to)	6,150lm
Luminaire output flux (up to)	4,613lm
Luminaire efficacy (up to)	130lm/W
Colour temperature	4000K (Neutral white 740); 3000K (Warm white 730) CRI ≥70
Lifetime of the LEDs @Tq 25°C	50,000h - L70B10
Lifetime of the Driver @Tq 25°C	60,000h ≤10% failure rate



INDUSTRIAL HALLS & WAREHOUSES



WAREHOUSE



LOADING BAY



PUBLIC BUILDINGS



SHOPPING CENTRE



COMMERCIAL BUILDINGS

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



LOCALLY
manufactured

2024-07

Copyright © BEKA Schröder (Pty) Ltd – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.