

SERIES 20

Decorative LED bulkhead



LOCALLY
manufactured

SERIES 20



Standard version



With quarter-grid (optional)

Timeless square bulkhead luminaire range

This long-time favourite bulkhead, with a straight-edged simple design, is the ideal solution to beautify buildings and to provide general area lighting for commercial developments, retail areas, shopping malls and public buildings. The subtle yet effective option with a quarter-grid cover further enhances your application.

The optional battery back-up version is the perfect solution for loadshedding. It provides four hours of back up lighting, and utilizes a fast-charging inverter, hence it charges up in time for the next loadshedding cycle.

High-quality materials are used to ensure a high ingress protection and non-discolouring diffuser. This, together with the long lifetime of the LEDs, and an easy installation procedure, makes the SERIES 20 the bulkhead of choice.



PUBLIC BUILDING



SHOPPING CENTRE



COMMERCIAL BUILDING



SPORT AREA



SECURITY LIGHTING

Key advantages

- Designed and manufactured in South Africa
- Optional battery back-up for loadshedding available
- Available with wireless control and dimming system, Schröder ITERRA
- Available with integrated movement sensor
- Operating temperature (Ta): -20°C to +35°C
- Minimum 50,000hrs useful lifetime (L70B10)
- Effective high-power LED, 4000K at a colour rendering index >80
- Ingress protection - IP 65
- Marine grade high-pressure die-cast aluminium base
- High-impact acrylic diffuser
- 3-year warranty (Terms and conditions apply)

Characteristics

GENERAL INFORMATION

Recommended installation height	2m to 4m
FutureProof	Easy replacement of the photometric engine and electronic assembly on-site
Driver included	Yes
ROHS compliant	Yes
Testing standard	SANS 60598, SANS 62262

HOUSING AND FINISH

Housing	Marine grade high-pressure die-cast aluminium (EN 1706 AC-44300)
Diffuser	High-impact acrylic (*)
Housing finish	Black (RAL 9017), Textured finish
Tightness level	IP 65
Maintenance	Easily accessible

(*) Suitable for Food & Beverage industry

DIMENSIONS AND MOUNTING

A (mm)	274
B (mm)	274
C (mm)	104
D (mm)	114
Weight (kg)	Standard version: 1.8 Emergency version: 2.1

ELECTRICAL INFORMATION

Electrical class	EU class I or II
Nominal voltage	230V +3%/-10% - 50Hz
Power factor	> 90% at full load
Electromagnetic compatibility (EMC)	SANS 55015:2013/A1:2015, SANS 61000-3-2:2014, SANS 61000-3-3:2013, SANS 61547:2009, SANS 62493:2015

OPTICAL INFORMATION

LED colour temperature	4000K (Neutral white 840)
Colour rendering index (CRI)	≥ 80 (Neutral white 840)

OPERATING CONDITIONS

Operating temperature range (Ta)	-20°C to +35°C
----------------------------------	----------------

LIFETIME OF THE LEDS @ TQ 25°C


For all versions	50,000h - L70B10
------------------	------------------

LIFETIME OF THE DRIVER @ TQ 25°C


For all versions	50,000h ≤10% failure rate
------------------	---------------------------

For options and accessories, please turn to page 6.

SERIES 20

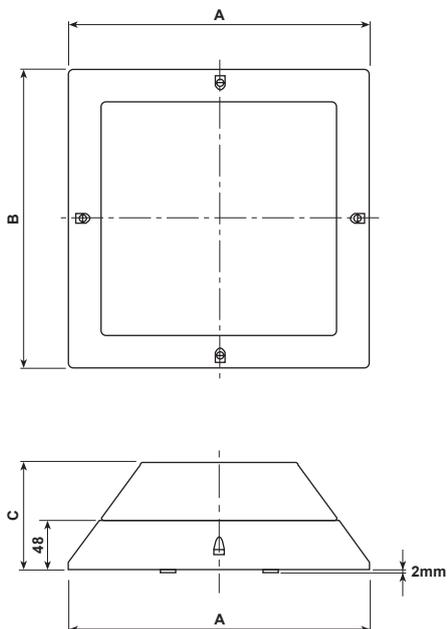

SERIES 20 with quarter-grid (optional)

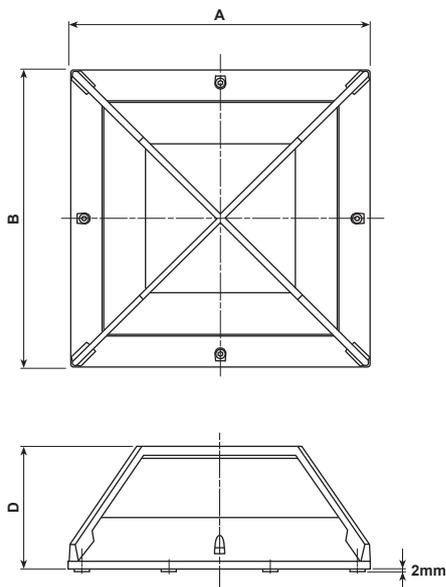

Performance



		Nominal flux (lm) ^(*)	Power consumption (W)	Nominal efficacy (lm/W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)
Luminaire	Line Current (A)	Typical	Typical	Typical	Typical	Typical
SERIES 20	0.04	1470	9	163	1220	136
	0.06	2070	13	159	1718	132
	0.08	2620	17	154	2175	127
SERIES 20 Battery back-up version	0.04	1470 / 350 ^(**)	9	163	1220	136
	0.06	2070 / 350 ^(**)	13	159	1718	132
	0.08	2620 / 350 ^(**)	17	154	2175	127


Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$

^(*) The nominal flux is an indicative LED flux @ Ts 85°C based on LED manufacturer's data. The real flux output of the luminaire depends on environmental conditions (e.g. temperature and pollution) and the optical efficiency of luminaire. The type of LED used is subject to change due to the ongoing rapid progress taking place in LED technology.

^(**) Reduced output during battery back-up mode. Battery back-up of 4 hours.

Light Distribution

SERIES 20 13W

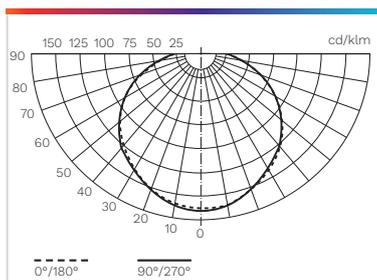

Key Features



Construction Details

The luminaire consists of a marine grade high-pressure die-cast aluminium (EN 1706 AC-44300) base and trim ring, and an opal high-impact acrylic diffuser. It is designed to operate LEDs from 1470lm (9W) to 2620lm (17W).

The luminaire bears the SANS 60598-2-1 safety mark. The luminaire has a degree of protection that complies with SANS 60598-2-1.

All base castings are finished both outside and inside in white epoxy powder coating for added protection and reflectivity. It is simple to install due to four mounting holes provided outside the optical compartment through lugs that form part of the base casting. The trim ring casting is mounted onto the base casting by stainless steel M5 Allen head screws, located outside the optical compartment. The fixing holes can be supplied with stainless steel helicoil inserts on request.

An opal non-discolouring high-impact acrylic injection moulded diffuser is used throughout the range. It offers excellent vandal resistance, is highly translucent and will not discolour even when subjected to the harshest UV environments. A silicon sponge gasket is fitted into a special groove in the diffuser to prevent damage to the gasket during installation. It fits snugly over a tongue provided on the base casting, thus achieving the certified ingress protection rating of IP 65.

All external screws, bolts and metals are stainless steel or non-corrosive material. Mains connections are by means of a suitable screw terminal block with a wire clamping contact. The power factor is rated at $\geq 0,9$.

Ordering Information

Example:

SERIES 20 BLK NW 9W HVBB

ID	Frame	Colour Options	LED Colour	Watt	Other Options
SERIES 20	X Quarter Grid	BLK Black (RAL 9017), Textured finish WHT White (RAL 9016), Textured finish SIL Pearl Light Grey (RAL 9022), Textured finish P/O Painted Other (RAL / Finish [Brilliant/Matt])	NW Neutral White (4000K)	9W 13W 17W	HC Helicoil VR Vandal-resistant screws HV Helicoil & vandal-resistant screws BB Battery back-up version (4 hours)

Custom Options

Correlated colour temperature	3000K (Warm white 830)
Switching/Dimming Control	Integrated movement sensor Integrated Schröder ITERRA
Emergency	Emergency version 3 hours maintained
Extras	Adaptor ring for surface wiring

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



LOCALLY
manufactured

2023-07

Copyright © BEKA Schröder (Pty) Ltd – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.