

OMNISTAR

MIDI

High-power LED floodlighting solution




LOCALLY
manufactured



IP 66

Up to
IK 10

Up to
20kV



CONTROL



CIRCLE
LIGHT



Key advantages

- Designed and manufactured in South Africa
- Designed to operate LED light sources of up to 226W in an ambient temperature (Tq) environment of up to 25°C, without reducing the useful lifetime of 100 000 hours, at a lumen depreciation of not more than 10% (L90B10)
- Cost effective and efficient lighting solution to maximise energy and maintenance cost savings in high-power applications
- ThermiX® (resists extreme temperatures: Ta up to 55°C) and IP 66 tightness level for long-lasting performance
- Instant switch on/off
- Sports applications: ball impact resistant
- Maintenance free
- Surge protection 10kV/10kA
- Available in battery back-up and Zone 2 and 21/22 versions
- Circular economy 3-star rating
- 5-year warranty (Terms and conditions apply)

Characteristics

GENERAL INFORMATION


Testing standard	SANS 60598, SANS 62262, SANS 475	
Housing	Marine grade high-pressure die-cast aluminium (EN 1706 AC-44300)	
Protector	High-impact clear glass	High-impact polycarbonate (optional)
Housing finish	Unpainted aluminium	
Aerodynamic resistance (CxS) (up to)	0.12m ²	
Nominal voltage	198-264V – 50Hz	
Surge protection	10kV / 10kA	20kV / 20kA (optional)
Operating temperature range (Ta)	-40°C up to +50°C	

OMNISTAR-MIDI

Wattage (up to)	226W
Nominal flux (up to)	36,023lm
Luminaire output flux (up to)	31,340lm
Luminaire efficacy (up to)	148lm/W
Colour temperature	4000K (Neutral white 740); 5700K (Cool white 757) CRI ≥70
Lifetime of the LEDs @Tq 25°C	100,000h - L90B10
Lifetime of the Driver @Tq 25°C	100,000h ≤10% failure rate



INTERCHANGE



AREA



INDUSTRIAL
HARBOUR



HIGHMAST
LIGHTING



MANUFACTURING



FAÇADE



SIGNAGE



STADIUM




UNIVERSITY
TRACK & FIELD




MULTI-PURPOSE
HALLS

Case Studies

Industrial Parking Area

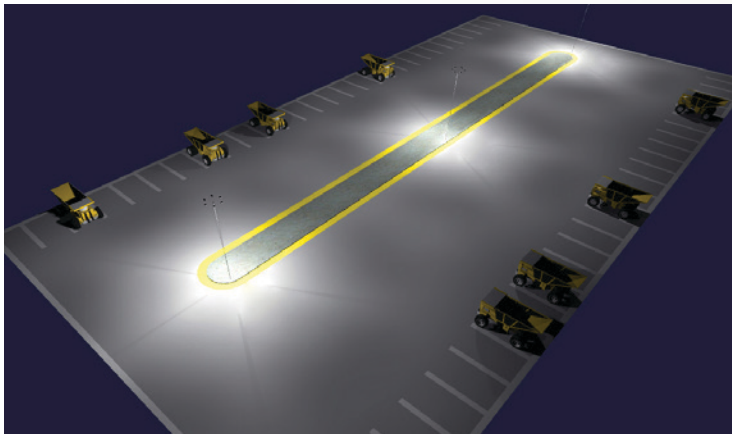


Energy Savings

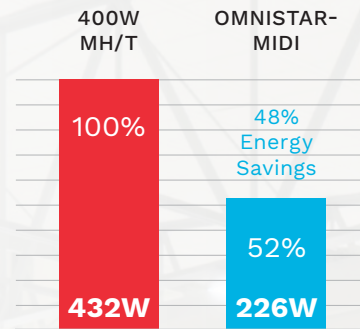


	Luminaire fitted with 400W Metal Halide lamp	OMNISTAR-MIDI 226W
Number of fittings	18	18
Energy used (W)	7 776	4 068
Energy saved (W)	3 708	

Recreational Sports - Basketball Major Club

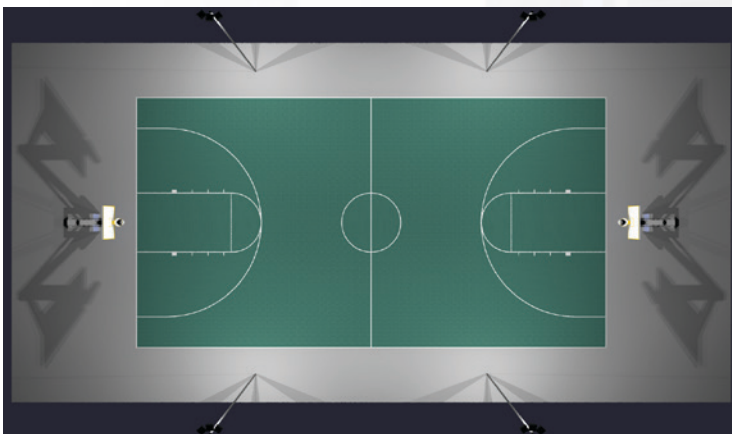

Energy Savings

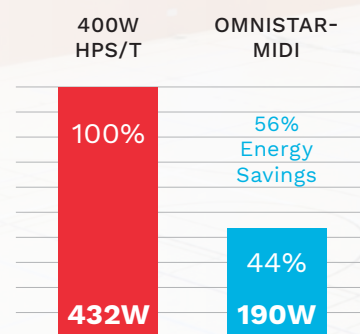

	Luminaire fitted with 400W Metal Halide lamp	OMNISTAR-MIDI 190W
Number of fittings	12	12
Energy used (W)	5 184	2 280
Energy saved (W)	2 904	

Please note: Above calculations are for demonstration purposes, please contact us for detailed energy saving and return of investment calculations.

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



LOCALLY
manufactured

2024-12

Copyright © BEKA Schröder (Pty) Ltd – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.