

SERIES 30


Decorative LED bulkhead



Standard version



With quarter grid
(optional)

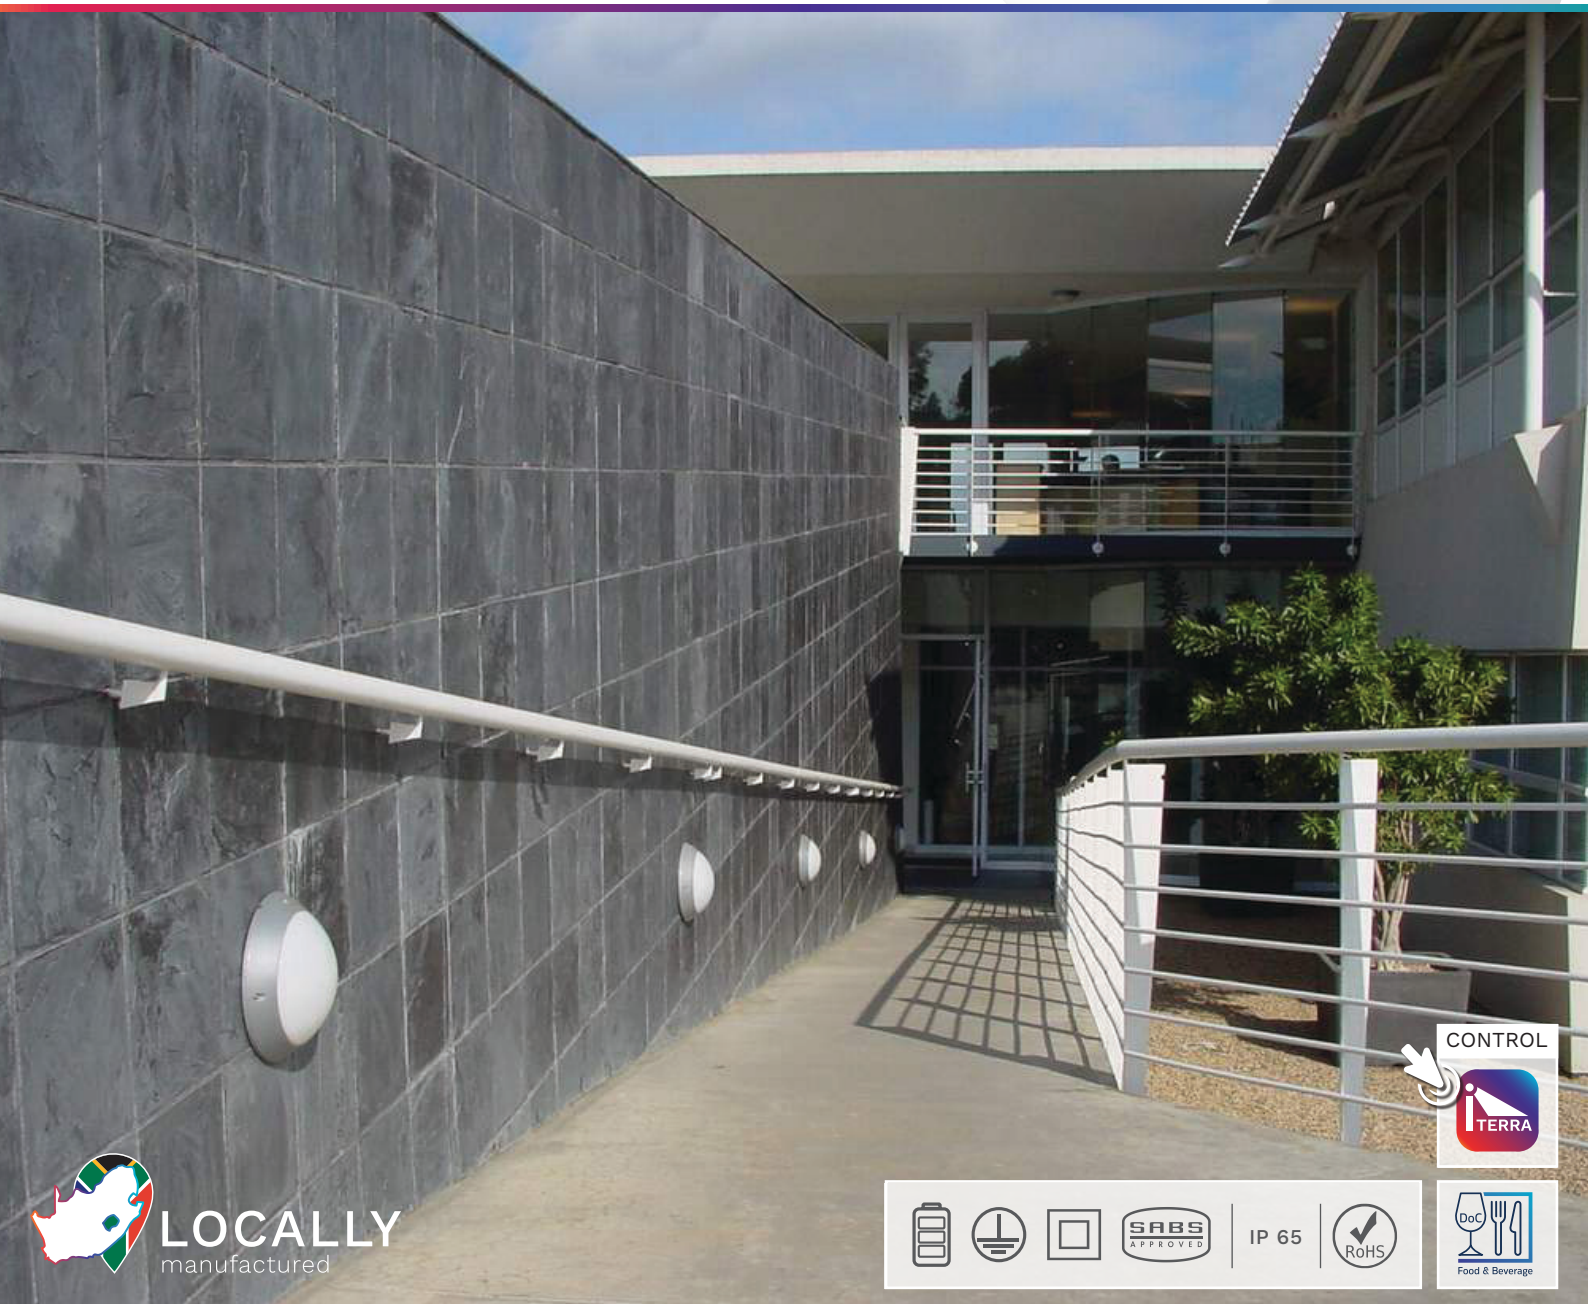

LOCALLY
manufactured



IP 65



Key advantages

- Designed and manufactured in South Africa
- Sophisticated design for ease of installation without compromising product lifetime
- Optional battery back-up for power supply interruptions
- Available with wireless control and dimming system, Schröder ITERRA
- High-quality materials for long lasting performance
- Designed for coastal and other harsh environmental conditions
- Highly efficient $\geq 122\text{lm/W}$ and long lasting LED technology
- Marine grade high-pressure die-cast aluminium base
- Minimum 50,000hrs useful lifetime (L70B10)
- 3-year warranty (Terms and conditions apply)

Characteristics

GENERAL INFORMATION

Testing standard	SANS 60598, SANS 62262
Housing	Marine grade high-pressure die-cast aluminium (EN 1706 AC-44300)
Diffuser	High-impact acrylic
Housing finish	Black (RAL 9017), Textured finish
Standard mounting	Wall/ceiling mounting
Nominal voltage	230V +3%/-10% - 50Hz
Operating temperature range (Ta)	-20°C up to +35°C

SERIES 30

Wattage (up to)	15W
Nominal flux (up to)	2,250lm
Luminaire output flux (up to)	1,868lm
Luminaire efficacy (up to)	127lm/W
Colour temperature	4000K (Neutral white 840); 3000K (Warm white 830) CRI ≥ 80
Lifetime of the LEDs @Tq 25°C	50,000h - L70B10
Lifetime of the Driver @Tq 25°C	50,000h $\leq 10\%$ failure rate



PUBLIC
BUILDING



SHOPPING
CENTRE



COMMERCIAL
BUILDING



SPORT AREA



SECURITY
LIGHTING

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



2025-10

Copyright © BEKA Schröder (Pty) Ltd - Twenty One Industrial Estate - 10 Purlin Street North - Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.