


# DUISA

Emergency lighting range



# DUISA

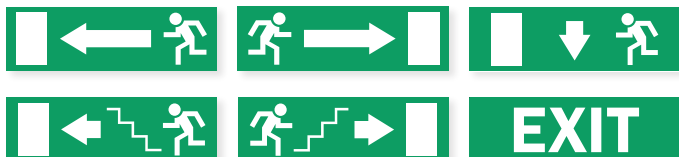

IP  
43/65  
IK  
04/07



D-ecoLD P130-3



Optional ceiling mounted version



eco-esLD P130-3



PUBLIC BUILDINGS



SHOPPING MALLS



INDUSTRIAL & COMMERCIAL COMPLEXES




RAILWAY STATIONS




OFFICE BUILDING

## Light Distributions

D-ecoLD

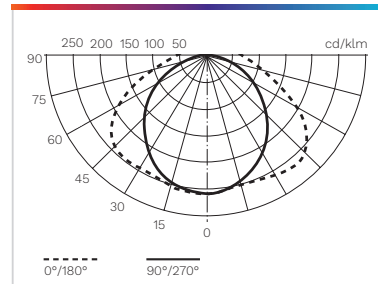

eco-esLD

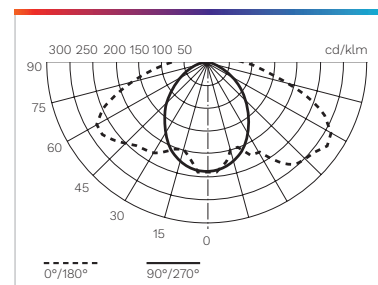

### Key advantages

- Degree of protection up to IP 65, IK 07
- 3-hour battery back-up
- High-temperature resistant Ni-Cd, NiMh Rechargeable accumulators
- Protection against excessive battery discharge
- Includes LED charge indication light
- Overcurrent protection
- Quick-fit plug-in system
- Four possible cable inlets, three on the side for tubes and one at the back

# Characteristics

## GENERAL INFORMATION

Non-maintained / Maintained	Maintained
Autonomy	3 hours
ROHS compliant	Yes
Testing standard	EN 60598-2-22, UNE 20-392-93, EN 55015, EN 61000-3-2, EN 61547, Comply with Low Voltage Directive 2006/95/EC, Electromagnetic Compatibility 2004/108/EC, RoHS 2002/96/CE and RoHS 2011/65/UE

## HOUSING AND FINISH


Housing	D-ecoLD P130-3 - Polycarbonate eco-esLD P130-3 - Polycarbonate
Protector	Polycarbonate
Tightness level	D-ecoLD P130-3 - IP 43 eco-esLD P130-3 - IP 65
Impact resistance	D-ecoLD P130-3 - IK 04 eco-esLD P130-3 - IK 07

## ELECTRICAL INFORMATION

Electrical class	EU class II
Nominal voltage	220-230V – 50Hz
Electromagnetic compatibility (EMC)	EN 55015 EN 61000-3-2

## DIMENSIONS AND MOUNTING

LxWxD (mm)	D-ecoLD P130-3 - 245x82x56 eco-esLD P130-3 - 262,5x99,5x67
Mounting	Wall-mounted

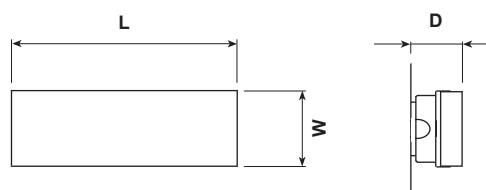

# Ordering Data







Description	Autonomy	Lumen
D-ecoLD P130-3	3h	130
eco-esLD P130-3	3h	130

# Options & Accessories

## Mechanical

Mounting	Wall flush mounting (white)
	Ceiling mounting

## Standard signage

	ECO112		ECO114		ECO116
	ECO113		ECO115		ECO124

# BEKA Schröder

Experts in lightability™



[www.beka-schreder.co.za](http://www.beka-schreder.co.za)

Distributed by BEKA Schröder (Pty) Ltd

2019-03

Copyright © BEKA Schröder (Pty) Ltd 2019 – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.